

Job:

Location:

Schedule No.:

System Designation:

Wall Mounted Indoor Unit

FEATURES

- Pre Heat Function
- Auto Addressing
- Auto Swing Louvers • Electronic Expansion Valve
- DC Fan Motor
- Auto Restart

SPECIFICATIONS			
PERFORMANCE			
Cooling Capacity ¹ (Btu/h)	12,000		
Heating Capacity ¹ (Btu/h)	13,600		
Airflow (CFM)	High	350	
	300		
	Low	280	
External Static Pressure (in.	-		
Sound Pressure (dBA)	High	35	
	Medium	33	
	Low	32	
ELECTRICAL DATA			
Power Supply (V/Hz/Φ)	208-230/60/1		
Minimum circuit ampacity (0.27		
Max. Overcurrent Protection	15		
Cooling Power Input ² (W)		25	
Cooling Rated current (A)	0.25		
Heating Power Input ² (W)	25		
Heating Rated current (A)	0.25		
Indoor Fan Motor Input (W))	21	
DIMENSIONS			
Unit Dimensions (in)	Height	12-3/8	
	Width	39	
	Depth	8-3/4	
Liquid Pipe Connection (in))	1/4	
Gas Pipe Connection (in)	1/2		
Condensate drain connectio	5/8		
Unit Shipping Weight (lb)	35		
Unit Net Weight (lb)	27		

SUBMITTAL DATA - INDOOR UNIT VWMB012H4-2P

VRF HEAT PUMP & HEAT RECOVERY

Architect:

Date:

For: DReference DApproval DReview DConstruction

- Flare Connections
- LED Display
- Washable Filter
- Refrigerant R-410A
- Seven capacity sizes from 7,000 to 30,000 Btu/h



OPTIONAL ACCESSORIES

□Non-Programmable Controller	V0STAT54P
□Programmable Controller	V0STAT51P
□Infrared Wireless Controller	V0STAT52P-1
□Infrared Sensor	V0SNSR78P-1
□Hotel Keycard Interface	V0CTRL88P-1

NOTES

- 1. Cooling and Heating capacity data is rated at the following conditions:
- Cooling: 80°FDB / 67°FWB Indoor, 95°FDB Outdoor Heating: 70°FDB Indoor, 47°FDB / 43°FWB Outdoor
- 2. Power Input values are rated at high fan speed.




Engineer:




SUBMITTAL DATA – INDOOR UNIT VWMB012H4-2P

VRF HEAT PUMP & HEAT RECOVERY

DIMENSIONAL DRAWINGS - INCHES (MM)

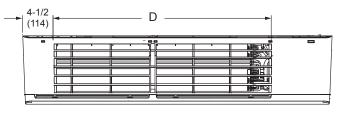

TOP VIEW

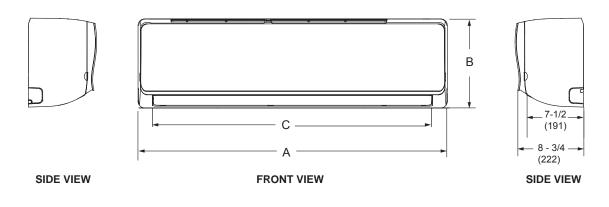

	А		В		С		D	
Size	in.	mm	in.	mm	in.	mm	in.	mm
007, 009, 012, 015, 018	39	991	12-3/8	314	34-5/8	879	27	686