

SUBMITTAL DATA – INDOOR UNIT VWMB024H4-2P

VRF HEAT PUMP & HEAT RECOVERY

| Job: | Engineer: |
|---------------------|---|
| Location: | Architect: |
| Schedule No.: | Date: |
| System Designation: | For: □Reference □Approval □Review □Construction |
| | |

Wall Mounted Indoor Unit

FEATURES

- Pre Heat Function
- · Auto Addressing
- Auto Restart
- Auto Swing Louvers
- Electronic Expansion Valve
- DC Fan Motor
- Flare Connections
- LED Display
- Washable Filter
- Refrigerant R-410A
- Seven capacity sizes from 7,000 to 30,000 Btu/h

| SPECIFICATIONS | | |
|---------------------------------------|--------|--------------|
| PERFORMANCE | | |
| Cooling Capacity ¹ (Btu/h) | | 24,000 |
| Heating Capacity ¹ (Btu/h) | | 27,300 |
| Airflow (CFM) | High | 620 |
| | Medium | 530 |
| | Low | 430 |
| External Static Pressure (in. | - | |
| Sound Pressure (dBA) | High | 44 |
| | Medium | 41 |
| | Low | 38 |
| ELECTRICAL DATA | | |
| Power Supply (V/Hz/Φ) | | 208-230/60/1 |
| Minimum circuit ampacity (| 0.52 | |
| Max. Overcurrent Protection | (MOCP) | 15 |
| Cooling Power Input ² (W) | | 60 |
| Cooling Rated current (A) | | 0.5 |
| Heating Power Input ² (W) | | 60 |
| Heating Rated current (A) | | 0.5 |
| Indoor Fan Motor Input (W) | | 40 |
| DIMENSIONS | | |
| Unit Dimensions (in) | Height | 13-1/2 |
| | Width | 47 |
| | Depth | 10-3/8 |
| Liquid Pipe Connection (in) | | 3/8 |
| Gas Pipe Connection (in) | | 5/8 |
| Condensate drain connection | n (in) | 5/8 |
| Unit Shipping Weight (lb) | | 51 |
| Unit Net Weight (lb) | | 38 |
| | | |



| OPTIONAL ACCESSORIES | | | | | | |
|-------------------------------|-------------|--|--|--|--|--|
| □Non-Programmable Controller | V0STAT54P | | | | | |
| □Programmable Controller | V0STAT51P | | | | | |
| ☐Infrared Wireless Controller | V0STAT52P-1 | | | | | |
| □Infrared Sensor | V0SNSR78P-1 | | | | | |
| ☐Hotel Keycard Interface | V0CTRL88P-1 | | | | | |

NOTES

- Cooling and Heating capacity data is rated at the following conditions:
 Cooling: 80°FDB / 67°FWB Indoor, 95°FDB Outdoor Heating: 70°FDB Indoor, 47°FDB / 43°FWB Outdoor
- 2. Power Input values are rated at high fan speed.








SUBMITTAL DATA - INDOOR UNIT VWMB024H4-2P

VRF HEAT PUMP & HEAT RECOVERY

DIMENSIONAL DRAWINGS - INCHES (MM)

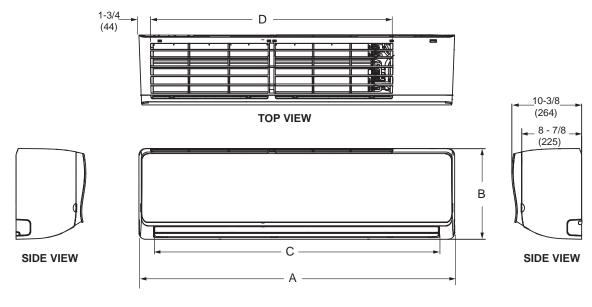

FRONT VIEW

| | Α | | В | | С | | D | |
|------|-----|------|--------|-----|--------|------|-----|-----|
| Size | in | mm | in | mm | in | mm | in | mm |
| | in. | mm | in. | mm | in. | mm | in. | mm |
| 024 | 47 | 1194 | 13-1/2 | 343 | 42-1/2 | 1080 | 36 | 914 |